


Typical Sound Wall - Sequence of Construction

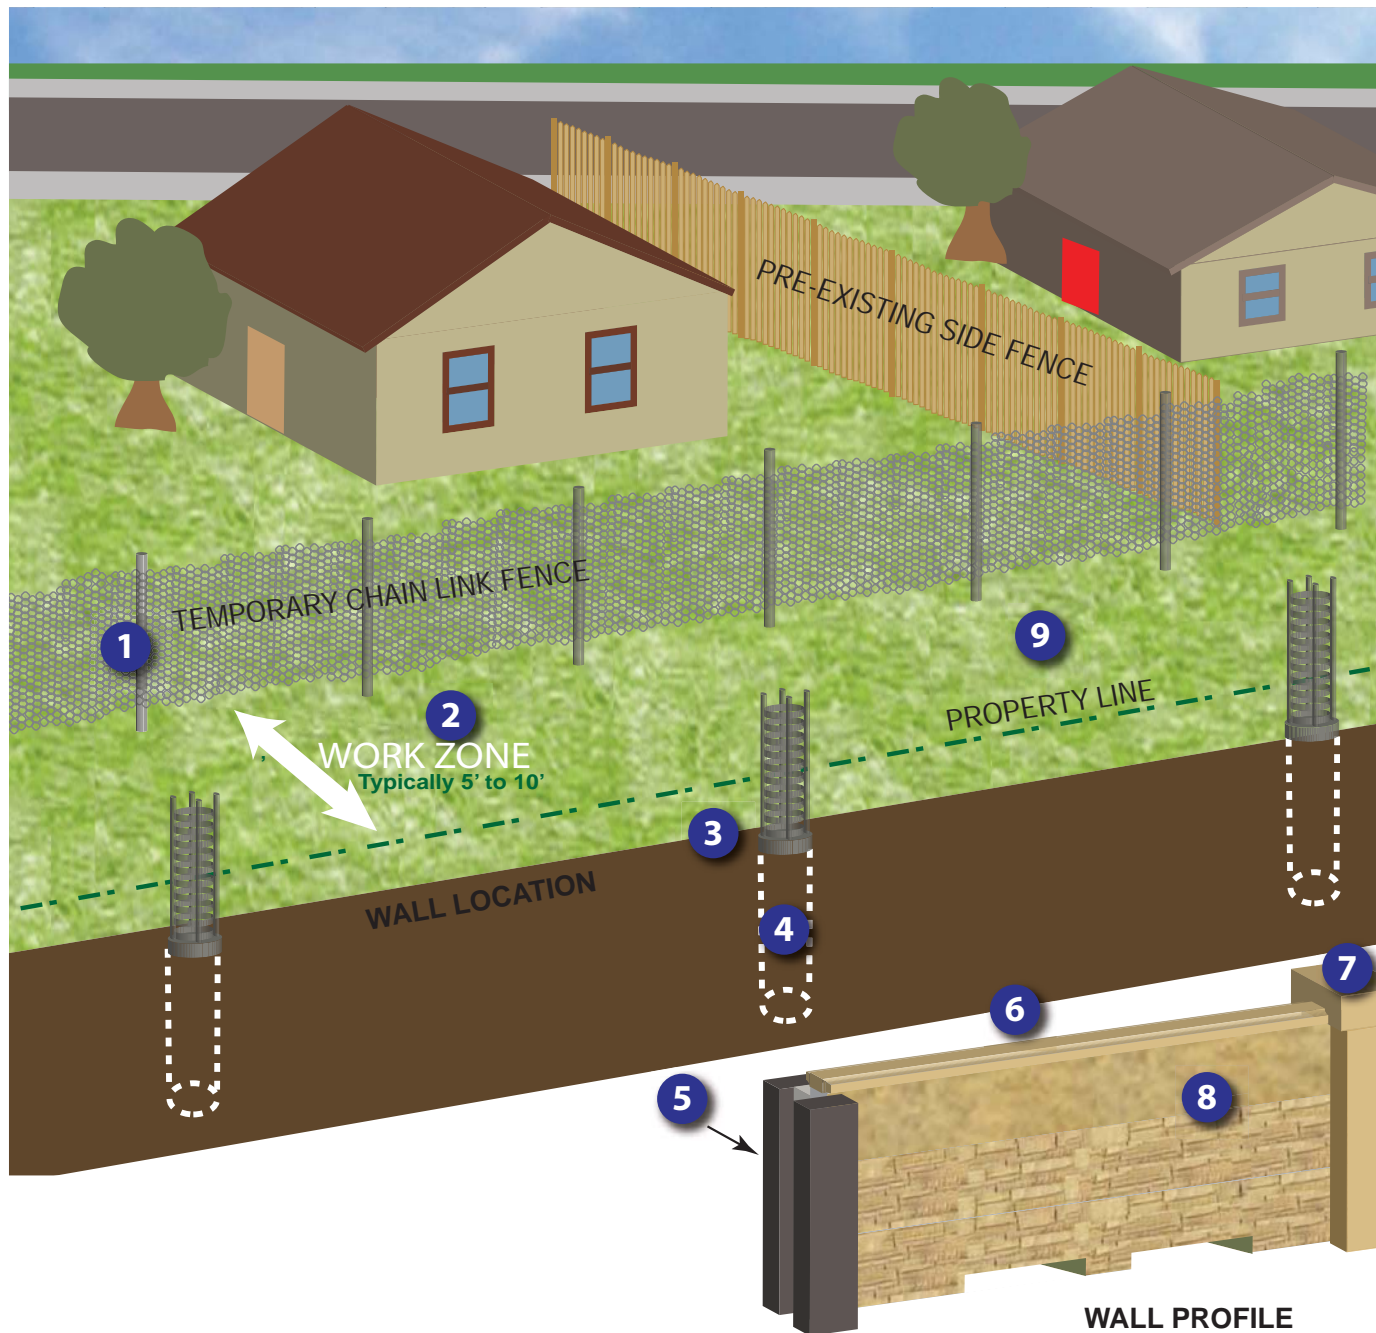

- 1 Install temporary chain link fence
- 2 Prepare area for construction
- 3 Drill 24" diameter holes and insert reinforcing steel
- 4 Pour concrete into the holes; allow to cure for at least 48 hours
- 5 Erect precast concrete "H"-shaped column over the exposed reinforcing steel
- 6 Install precast concrete wall panels in between the concrete posts
- 7 Set precast concrete cap on top of each post
- 8 Apply color finish to entire wall
- 9 Remove temporary fencing and restore backyard

Actual installation and conditions will vary.
Diagram is for general illustrative purposes only.